

# 2100-BOS-R1 System



Designed to apply self penetrating Medium & Heavy Oils up to NLGI #0 Soft Grease.

Accommodates Wire Rope Sizes From: 0.04" (1mm) to 1.69" (43mm)

## ADVANTAGES

- High rope speed lubrication.
- Even lubricant coverage.
- No lubricant wastage.
- Eliminates or reduces lubricant fling-off.
- One brush size covers a large range of rope sizes. Eliminates the need for a rubber seal for every size of wire rope.
- Bushings remove exterior contaminants.
- Cables deformities can be run through the collar.
- Bushings snap into the collar without tools.
- Operates at any angle or direction.
- The same pump can fit all sizes of containers from a drum to a pail.
- The collars are extremely strong and lightweight.
- Air jets dry the cable before lubrication.
- Easy to use.



2100-BOS Collar

The 2100-BOS-R1 system is designed to apply semi fluids & soft greases that are self penetrating.




Heavy Coating



Light Coating

The wire ropes shown above have been coated with the same lubricant and system.

## (3) System Sizes Available

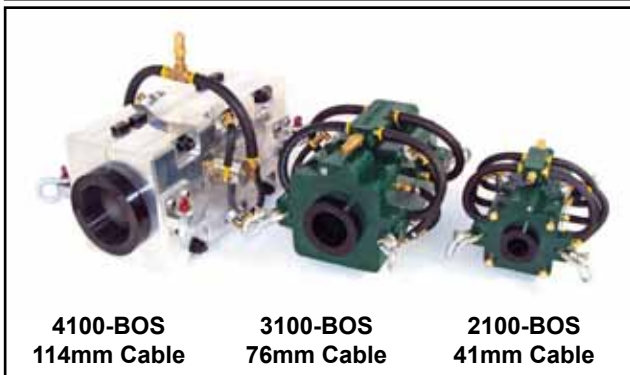

4100-BOS  
114mm Cable

3100-BOS  
76mm Cable

2100-BOS  
41mm Cable




# 2100-BOS-R1 System

**FIGHT** CORROSION with our 2100-BOS System

ROV



Protect all your Wire Ropes and EM Cables from corrosion.

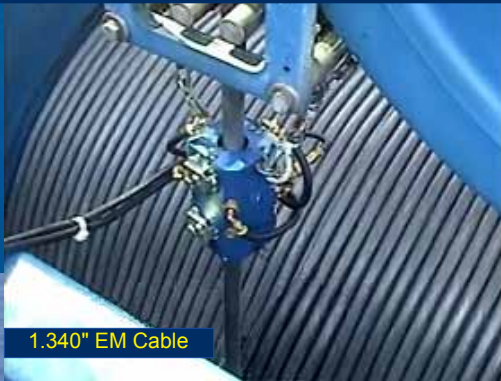

1.340" EM Cable



Penetrating the individual wires that make up the outer strands and core wires can only be achieved with self-penetrating cable lubricants.

WOODS HOLE OCEANOGRAPHIC



ATLANTIS



ATLANTIS  
30,000' of 1/4" 3-19 Cable

2100-BOS SYSTEM

Corrosion Protection

Before

After



A.P.M. TERMINAL



TSI TERMINAL



0.680" EM Cable

NOAA



The 2100-BOS SYSTEM effectively addresses the problem of lubricating the static wire ropes on gantry cranes as well as the working wire ropes.

Contact us on how to lubricate Static Wire Ropes.



Phone: 403-529-9645 Fax: 403-527-1369  
E-mail: [sales@corelube.com](mailto:sales@corelube.com)  
[www.corelube.com](http://www.corelube.com)